


Date Created: 26/11/15

Product: X-Wam

Title: Hydraulic Block Fittings




SAFETY! Before attempting to make any adjustments or carry out maintenance on the mower, review the hazard identification table (section 3a of your Operator Manual) and take all necessary precautions.

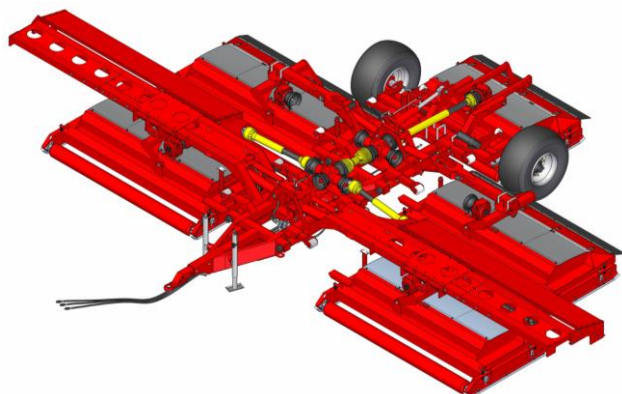


Lower the decks


Relieve hydraulic pressure

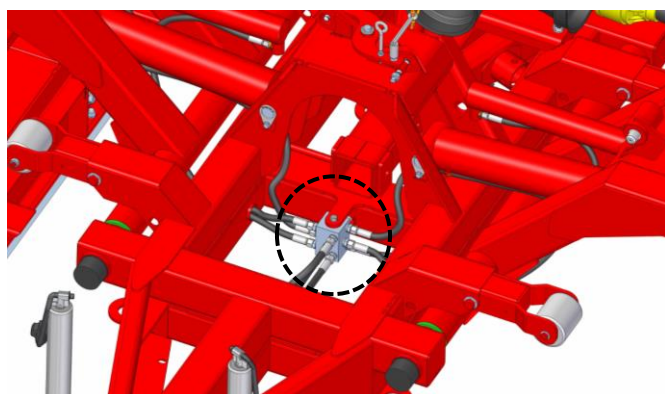

Remove the hydraulic fittings from the Hydraulic Junction Block

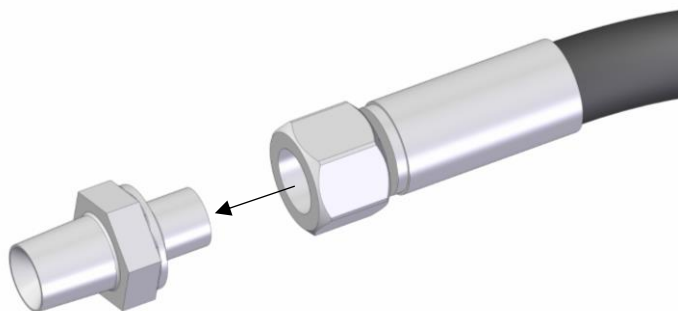


Remove the 1/4" BSPT - BSPP Hydraulic Fittings from the ends of the Hydraulic Hoses

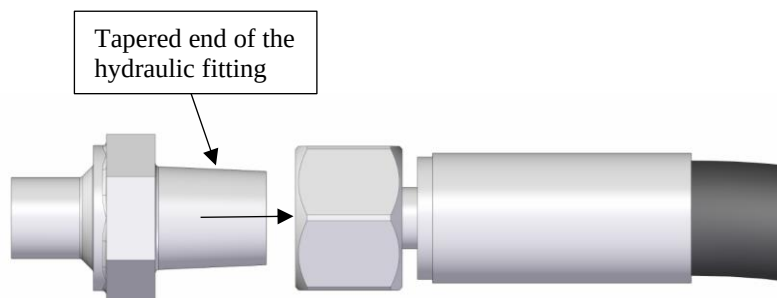

Tapered end of the hydraulic fitting

Re-fit the 1/4" BSPT - BSPP Hydraulic Fittings as detailed.

Tapered end of the hydraulic fitting goes into the hydraulic hose

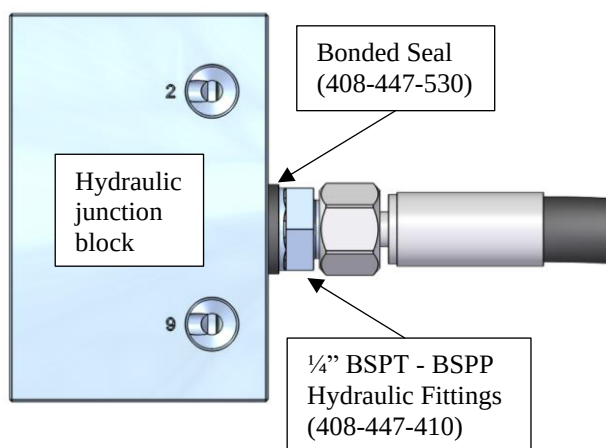

Bonded Seal
(408-447-530)

Hydraulic
junction
block

1/4" BSPT - BSPP
Hydraulic Fittings
(408-447-410)

Fit a Bonded Seal (408-447-530) between the non-tapered end of the hydraulic fitting and the hydraulic junction block